

# The Smart 3-Phase Hybrid System



Redback's Smart 3-Phase Hybrid System is a robust hybrid solution designed for three phase homes or light commercial installations.

The system combines a 10kVA solar inverter with two standard battery storage capacity options of either 9.6 or 14.2kWh and an option for an extended capacity of 19.2 or 28.4kWh.




Image shown with extended battery cabinet BE14000-HV



**9.6kWh, 14.2kWh,  
19.2kWh or 28.4kWh  
Battery Storage Capacity**



**Backup Supply in a  
Power Outage\***



**Streamlined  
All-In-One Design**



**Indoor or Outdoor  
Installation**



**Easy Monitoring App  
and Portal**



**Australian-supported  
10-Year Warranty**


\*When backup circuit is connected, and battery energy is available. Appliances selected at the time of install.

# The Smart 3-Phase Hybrid System

Scan to Download  
System Information Pack



<b>Product Model</b>	<b>ST10000</b>
<b>PV Port</b>	
Number of MPPTs	2
Strings per MPPT Input	1/2
MPPT Operating Voltage (range)	DC 200 - 550V*
Maximum Input Voltage (Vmax)	DC 600V*
Maximum Current (Imp)	DC 12.5/22A
Short Circuit Current (Isc)	DC 15.2/27.6A
<b>Grid Interactive Port</b>	
Nominal Output Voltage	AC 400/380V
Nominal Output Frequency	50 Hz
Max. Output Current	AC 16.5A / phase
Rated Output Apparent Power	10000VA
Rated Input Current	AC 22.7 A/phase
Rated Input Apparent Power	15000VA
Power Factor (range)	0.8 lagging to 0.8 leading
Output Voltage THD	<3%
<b>Backup Port</b>	
Nominal Output Voltage	AC 380/400,3L/N/PE
Nominal Output Frequency	50 Hz
Rated Current	AC 16.5A / phase
Rated Active Power	AC 10000W
Rated Apparent Power	10000VA
Peak Apparent Power	16500VA (60 sec max)
Output Voltage THD	<3%
<b>Battery Port</b>	
Voltage (nominal)	DC 180 - 600V
Max. Current (charge)	DC 25 A
Max. Power (charge)	DC 10000W
Max. Current (discharge)	DC 25 A
Max. Power (charge)	DC 10000W
Battery Type	Li-ion
Battery Depth of Discharge	90%
<b>General Information</b>	
Operating Temperature	-35°C to 60°C
Operating Temperature Derated Output	Below 10°C and over 45°C
Operating Relative Humidity	0 - 95%
Operating Altitude	0 - 4000m
Protective Class	I
Ingress Protection Rating	IP66
AC Overvoltage Category	OVC III
DC Overvoltage Category	OVC II
Active Anti-islanding Method	Active Frequency Drift
Inverter Topology	Non-isolated
Country of Origin	China
Demand Response Modes	DRM 0
Standby Self-Consumption	<15W
Noise Emissions	<30 dBA
Warranty	10 Years
<b>Efficiency</b>	
Maximum Efficiency	97.60%
Maximum Battery to Load Efficiency	97.50%
European Efficiency	96.80%
<b>Physical Data</b>	
Installed Weight	127-210kg
Material	Aluminium
Finish	Sealed and powder coated
<b>Battery Enclosure Data</b>	
Enclosure Model	BE14000-HV
Name	Smart Hybrid Battery Enclosure
Chemistry (label only)	
Number of Battery Units	4 or 8
Storage Capacity	N x 2.4kWh N x 3.55kWh
Battery System Model	RB-HVS-Nx48-50 RB-HVS-Nx48-74
Maximum Capacity	28.4kWh**
Nominal Voltage	DC N X 48V
Rated Current	DC 25A
Fan Specification	DC 12V / 0.3A x2
Protective Class	I
Ingress Protection Rating	IP54
Material	Steel
Finish	Sealed and powder coated
<b>Isolation Devices</b>	
PV Port Isolator Utilisation Category	DC-PV2
Grid Interactive Port Isolator Rated Operational Current	40A
Backup Port Isolator Rated Operational Current	25A
Battery Port Isolator Rated Operational Current	32A
Battery Cabinet Isolator Rated Operational Current	32A
<b>Communications Ports and Protocols</b>	
Relays	RJ45; 3x Digital I/O; +DC5V & GND
<b>User Interface</b>	
Front Panel Display	Coloured LEDs
Communications	Bluetooth for commissioning; Wi-Fi or ethernet for remote access
Remote Access	Web Portal; MyRedback App; Redback Install app
Remote Firmware Updates	Supported
Power/Energy Monitoring	Includes 1 x utility grade energy meter (class 1)
<b>Certifications and Approvals</b>	
	AS/NZS 4777.2:2020
	IEC 62109-1:2010
	IEC62109-2:2011
	IEC 62116:2014
	IEC 62040-1:2017
	IEC 62477-1:2012
	IEC 60529
	EN 61000
	RCM
	CE
<b>Designed with Installation Standards Considered</b>	AS/NZS 3000:2018 AS/NZS 5033:2014 (inc. Amd 1 & 2) AS/NZS 5139:2019

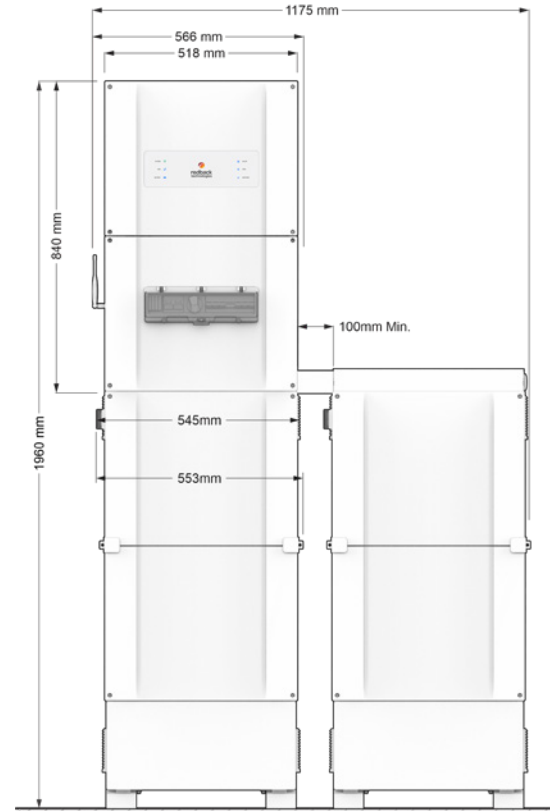

\*600 V maximum voltage for PV arrays on domestic dwellings N = number of battery modules  
\*\*Maximum capacity 14.2kWh with single cabinet, or 28.4kWh with optional expansion cabinet.